

Features

- Excellent color rendering (90+ CRI)
- Adjustable CCT from 2700K to 6000K
- Up to 365 lumens per foot performance
- Consumes up to 7 watts per foot
- Cuttable every 3.94"
- 13.1 foot max run
- (IP54) unjacketed
- 50,000 hours rated life

Available CCT



2700K-6000K
Tunable CCT

Control Options

- Trulux Tunable CCT Controls
- Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver

Listing / Ratings




TRULUX™ Tunable Spec Grade - 24V

For high performance applications, use Tunable Spec Grade, which offers up to 365 lumens of 2700K to 6000K light per foot. Adjust and modify any space's look with full-range white light tuning with the high CRI that Trulux provides. Trulux wall controls and remote controls deliver convenient tuning and dimming for a custom system.

Technical Information

Series	SPTL-TW
Input Voltage	24V
CCT	2700K-6000K Tunable CCT
CRI	90+
Wattage	Up to 7W per ft
Lumens	Up to 365Lm per ft
Max Run	13.1 feet
Cuttable	Every 3.94"
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

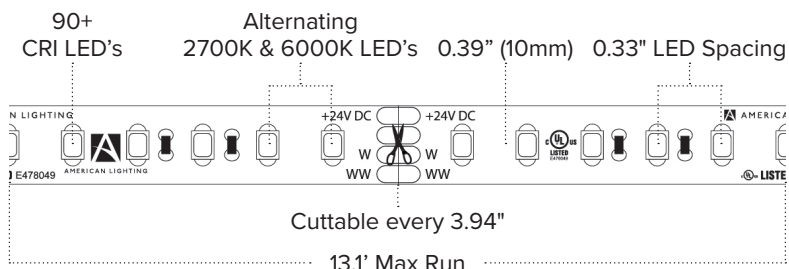

Tunable CCT 2700K to 6000K
up to 7W per ft / up to 365Lm per ft

13.1ft Reels



SPTL-TW (13.1ft)

Custom Cut



SPTL-TW-CC

SPTL-TW (IP54) 13.1ft Reels include: Attached 3ft lead wires / (3) Standard Power Connectors
Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building a Tunable CCT Trulux System?

See pages (38-39) for compatible Tunable CCT Trulux controllers & accessories

Trulux Tunable CCT Accessories



HD Power Feed (IP54)
TL-4PWR-HD



HD Splice (IP54)
TL-4SPL-HD



HD Linking Cable (IP54)
TL-4JUMP6-HD (6")
TL-4JUMP24-HD (24")

Trulux Tunable CCT Control



Single Zone Push Dial
Wireless RF Wall Controller
TWRF-BATT



4 Zone Touch Slide
RF Wall Controller
TWRF-4Z



4 Zone Touch Slide
DMX Wall Controller
DMX-TW-4Z




4 Zone Remote
RF Remote Control
TWRF-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z

Trulux Tunable CCT Set-up



Push Dial Controller
(Single zone)



Adaptive LED Driver
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required)



Trulux Tape Light